

# EverBlock 1 Modular Flooring

## SPECIFICATION SHEET

**EverBlock® 1** is EverBlock's general purpose modular interlocking flooring system. It can be used for a variety of applications at all types of venues and facilities. **The EverBlock1** is a **12" x 12"** flooring tile that interconnects with adjacent tiles to create a seamless floor surface and a solid support base for all types of activities. From exhibit floors to game courts and from basement flooring to garage floors, the **EverBlock 1** is a versatile floor for a multitude of event, business, institutional and home uses.

### MODULE SIZES

Item	Description	Length	Width
EBF1	EverBlock 1	12" (30.48 cm)	12" (30.48 cm)
		Thickness	Weight
		1.1" (2.79 cm)	1.27 lb. per tile

### MATERIAL

Hi-Impact Polypropylene Co-Polymer ("no-break") with UV Inhibitors added for outdoor use.

### COLORS

\* Custom colors available with minimum order sizes. Premium colors gold and silver are \$0.25 extra.

<b>RED</b> (PMS 185)	<b>GREEN</b> (PMS 347)	<b>LIGHT GREY</b> (PMS 428)	<b>DARK GREY</b> (PMS 425)	<b>LIGHT BLUE</b> (PMS 304)	<b>BLUE</b> (PMS 286)	<b>YELLOW</b> (PMS 810)	<b>BROWN</b> (PMS 469)
<b>ORANGE</b> (PMS 804)	<b>BLACK</b> (PMS Black C)	<b>WHITE</b> (No PMS)	<b>TRANSLUCENT/ MILKY WHITE</b> (No Color)	<b>PINK</b> (PMS 13-1520)	<b>PURPLE</b> (PMS Violet)	<b>GOLD</b> (No PMS)	<b>SILVER</b> (No PMS)

### VERSIONS

#### Solid Top (ST)

Features a flat top surface



#### Drainage Top (DT)

Contains a series of drainage, light, and aeration holes



#### Base Tile (BS)

Contains lug connectors on top to integrate with EverBlock building blocks



## FIRE RATING

**UL94HB** (Underwriters Laboratory Test):

\*This test signifies that **EverBlock** does not flare up when exposed to an open flame and has a slow burn rate of 2" per minute for a 2" wide, 0.5 millimeter thickness test sample. EverBlock meets all applicable standards for temporary floor covers.

Hot wire ignition rating: **3**


**ASTM 2859** (Flammability Of Finished Textile Floor Covering Materials): **PASS**

## SHIPPING QUANTITIES

Standard Pallet:	40" x 48" x 84	smaller quantities may be ordered	630 sq/ft
53ft Truckload Quantity:	26 Pallets		16,380 sq/ft
20ft Ocean Container:	10 Pallets		6,300 sq/ft
40ft Ocean Container:	20 Pallets		12,600 sq/ft
40ft High Cube Ocean Container:	20 Extra Tall Pallets		12,600 sq/ft
Military 463L Pallet (88" x 98" x 96"):	2,400 sq/ft maximum loading		

## WEIGHT LOADING CAPACITY: 8,500 lbs. sq/ft

\*On a solid subsurface, non-moving (static) weight, with equal distribution of load across the tile surface. **Support Structure:** Intersecting bi-directional support ribs provide structure, torsional strength, and additional weight distribution and weight loading capabilities.




## AVAILABLE ACCESSORIES

### Transition Edging: Male Edge, Female Edge, Corner Piece

Transition Edging is recommended for pedestrian access points and areas where wheeled equipment or pedestrians are expected to come on to the floor.

### Transition Cart:

Heavy duty wheeled cart that allows for easy transport and storage of flooring.

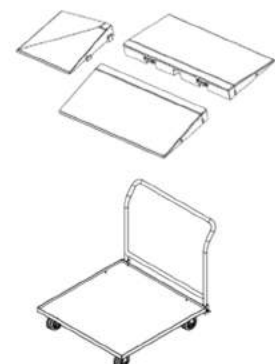

## USES OF EBF1:

**EverBlock 1** may be used for numerous applications

- Exhibition Flooring
- Outdoor Decks
- Game Courts
- Garage Floors
- Tent Flooring
- General Event Flooring
- Base for EverBlock Building Blocks
- Raised Flooring and Risers

## EVERBLOCK 1 FEATURES

**EverBlock 1** incorporates unique functional features that distinguish it from competitors

- Unique modular design allows sections to be connected to create nearly any sized floor
- Proprietary connection system allows for quick installation and removal WITHOUT any tools
- Lightweight construction for easy handling and transport
- Durable cross ribs add structural support, increase weight loading capacity and provide torsional stability
- Integrated cable channels allow for networking and power cables to be run underneath the flooring
- May be installed on top of EverBlock modular building blocks, allowing floors to be raised
- UV protected
- Fully waterproof and chemical resistant and may be used indoors and outside
- 100% recyclable
- Drainage (DT) version allows water and light through to facilitate photosynthesis and create a moisture canopy that protects grass for several day

## WARRANTY



Standard 3 year warranty against manufacturer's defects.